

EXPORTING GPS

GS2/GS3 STARFIRE 3000 OR 6000

- Models - John Deere Sprayers

FIGURE 1:

1. Select the menu icon (1).
2. Select the GPS receiver icon (2).

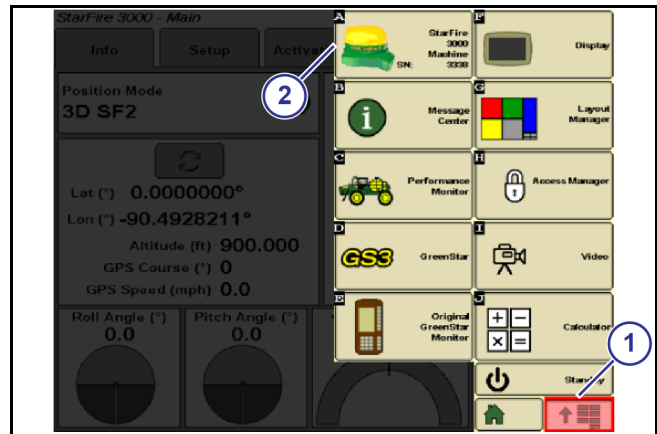


FIGURE 1

FIGURE 2:

3. From the GPS receiver main screen, select the Serial Port tab (1).

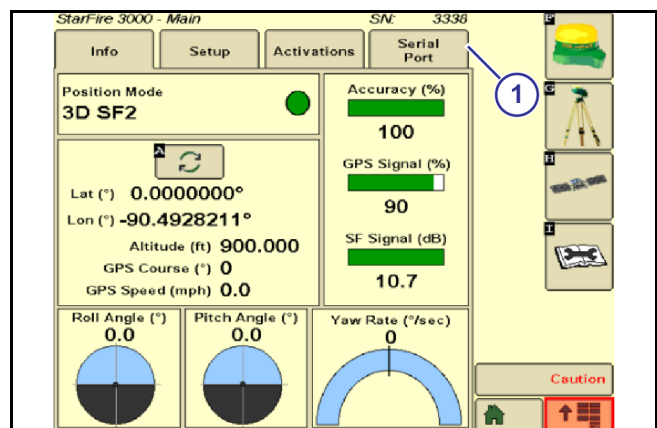


FIGURE 2

FIGURE 3:

4. On the Serial Port tab, change the Baud Rate (1) to 38400.
5. Change the Output Rate (2) to 10 hz.
6. Turn on, make sure that there is a check mark (3) in the boxes next to:
 - GGA
 - VTG
 - ZDA
7. Connect the GPS cable between the Starfire receiver and the sprayer cab and the 9-pin serial cable end to the CapView display.

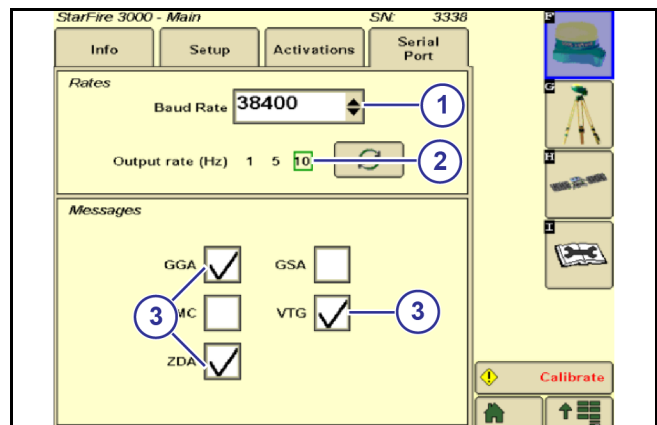


FIGURE 3

Models	Part Number	Description
4630/R4023	120051-001	GPS Cable
All other models	120047-001	GPS Cable

NOTES